

COLORS HD STB TUNING PROCESS

STEP-1

Remove IS20 Vertical RF cable from STB & Connect IS20 Horizontal RF cable




STEP-2

Press MENU key of Remote



STEP-3

Go to Manual SCAN

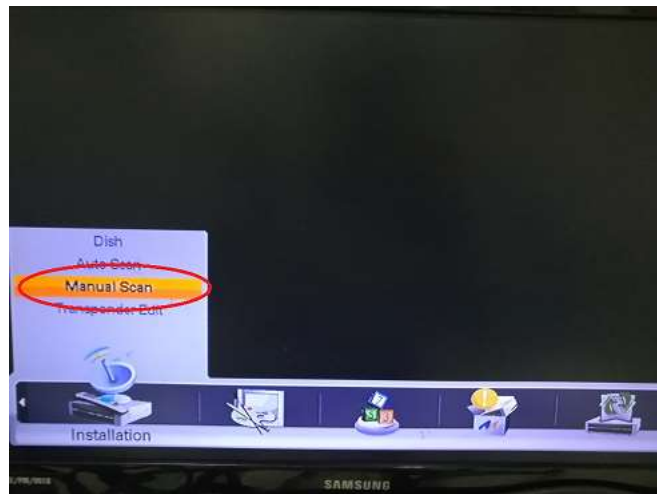


STEP-4

PRESS OK on Manual Scan from Remote




STEP-5

Insert PASSWORD '0000' From Remote

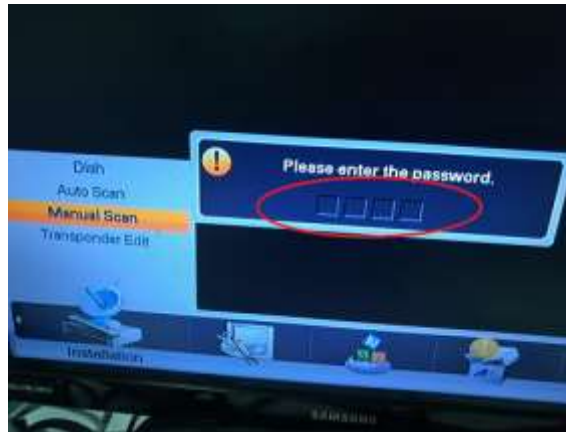


STEP-6

Change Polarity Vertical to Horizontal

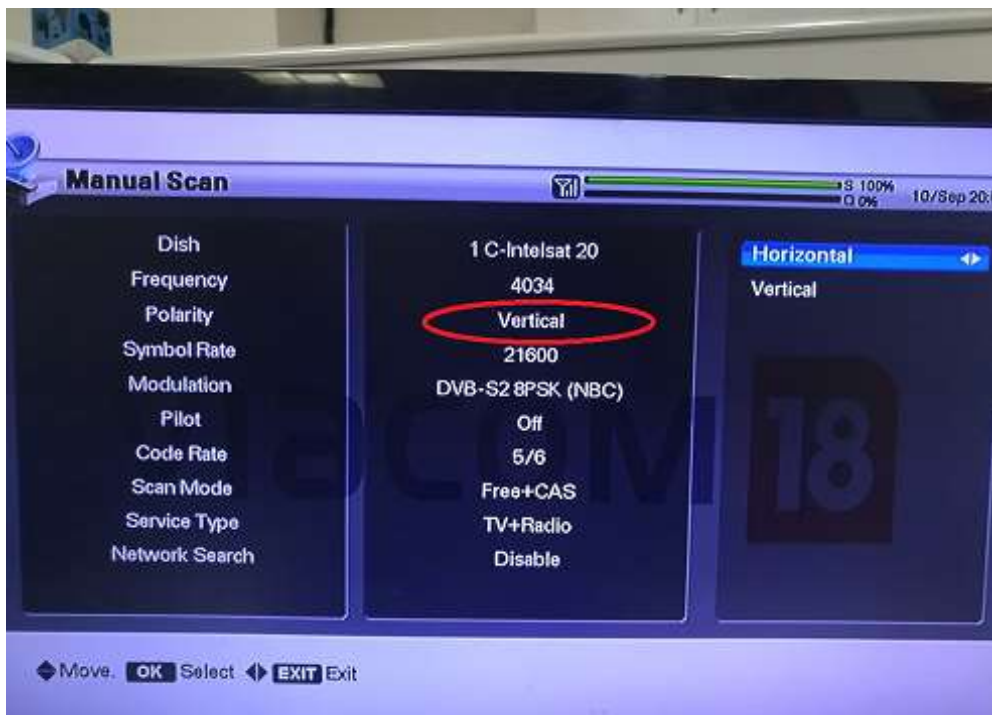

STEP-7

Change Symbol Rate 21600 to 20500 from Remote

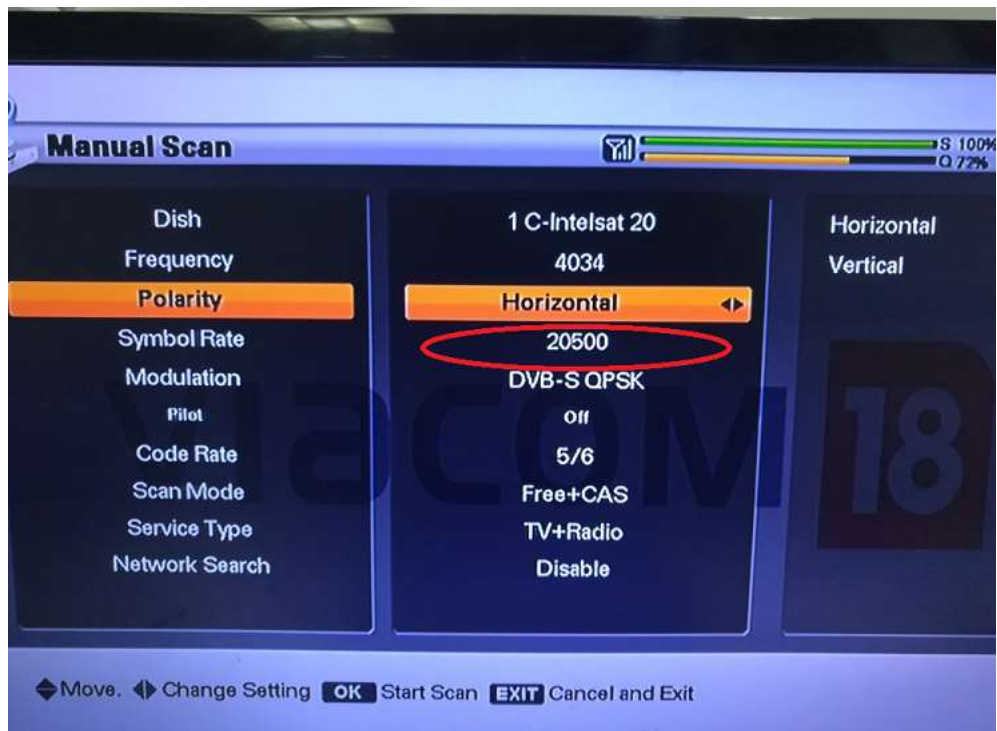


After change Symbol Rate Yellow signal will appeared on right side top corner



Step-8

Remaining Parameter will be same, then press OK key for SCAN
Scanning window will be appeared on TV screen

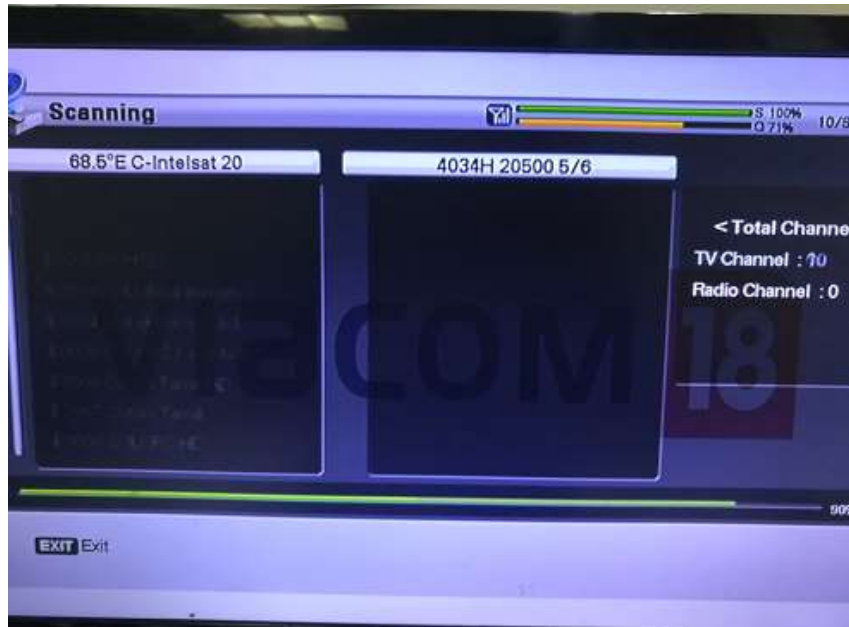

STEP -9

After scanning please exit from MENU by pressing return key from
Remote



STEP -10

Go to channel list select COLORS HD of new LCN of STB, window will appear as below



Now COLORS HD is tuned

STEP-11

After complete steps Reboot STB to check LCN